




F114, FB114 / F116, FB116 / F118, FB118




- Grey polyester jacket reinforced with fiberglass scrim
- Double-ply black polyester core 10" W.C. positive, 1/2" W.C. negative
- R-4.2 (F114, FB114) / R-6.0 (F116, FB116) / R-8.0 (F118, FB118)
- UL-listed
- GREENGUARD Listed for microbial resistance
- Offering: 4"-20" diameters (limited 3" availability)
25' lengths
Boxed or Bagged (FB series)

F214, FB214 / F216, FB216 / F218, FB218



- Metalized polyester jacket reinforced with fiberglass scrim
- Double-ply black polyester core 10" W.C. positive, 1/2" W.C. negative
- R-4.2 (F214, FB214) / R-6.0 (F216, FB216) / R-8.0 (F218, FB218)
- UL-listed
- GREENGUARD Listed for microbial resistance
- Offering: 4"-20" diameters (limited 3" availability)
25' length standard (limited 50' availability, boxed only)
Boxed or Bagged (FB series)

F314, F318 (Manufactured Home) Class 1 Air Duct



- Heavy-duty 4 mil. black polyethylene jacket
- Double-ply black polyester core 10" W.C. positive, 3/4" W.C. negative
- R-4.2 (F314), R-8.0 (F318)
- UL-listed
- GREENGUARD Listed for microbial resistance
- Offering: 6"-16" diameters
25' lengths
Boxed

F296, FB296 Commercial Series



- Metalized polyester jacket reinforced with fiberglass scrim
- High pressure 3-ply metalized/aluminum/polyester core, 15" W.C. positive 4" to 16" dia., 10" W.C. positive 18" to 20" dia., 2" W.C. negative 4" to 20" dia.)
- R-6.0 (F296)
- UL-listed
- GREENGUARD Listed for microbial resistance
- Offering: 4"-20" diameters
25' lengths
Boxed

AlumiFlex™ F040UCP




- One-end Crimped, compressed
- Non-Listed
- Offering: 3"-14" diameters
8' lengths
Boxed

500 Commercial Series




- High pressure multi-ply metalized/polyester core, 10" W.C. positive, 3/4" negative
- Class 1 air connector
- UL Listed
- GREENGUARD Listed for microbial resistance
- Offering: 3"-20" diameters
25' lengths
Boxed

F204, F206, F208




- Metalized polyester jacket reinforced with fiberglass scrim
- R-4.2 (F204) / R-6.0 (F206) / R-8.0 (F208)
(R-values valid if sleeve is used on relatively sized duct)
- Starter cone included in each carton
- UL-classified
- Offering: 4"-16" diameters
5' lengths
Boxed

AIR FRICTION CHART
HIGH PRESSURE

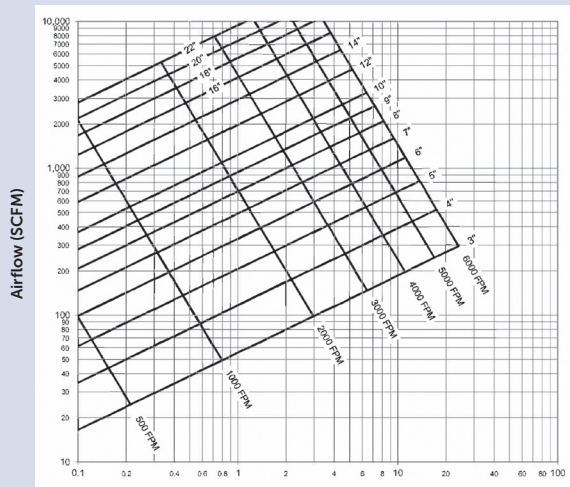


Pressure Drop (in. w.g. per 100 ft)

AIR FRICTION CHART
LOW PRESSURE

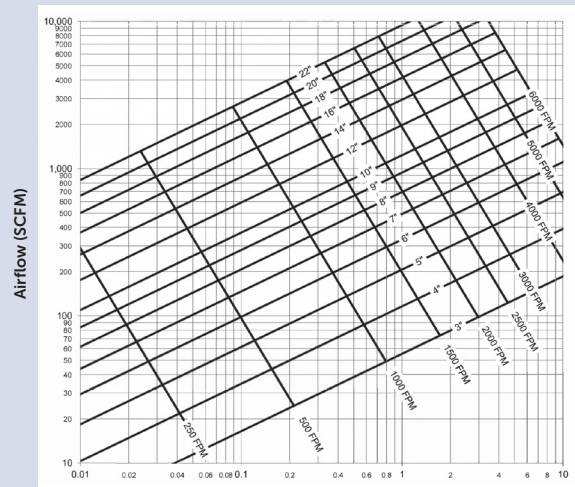


Pressure Drop (in. w.g. per 100 ft)

Model Selector Chart

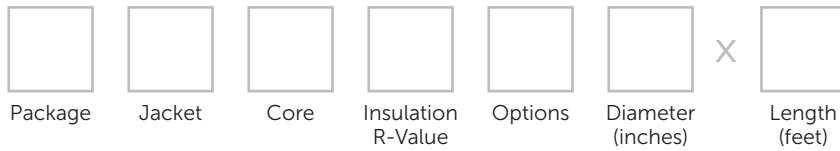

PACKAGE	JACKET	CORE	INSULATION	OPTIONS
F Boxed	0 No Jacket	0 No Core	0 No Insulation	UCP Uncrimped, Compressed
FB Bagged	1 Reinforced Grey Jacket	1 Double-Ply Black Polyester Core	4 R-4.2 Insulation	
	2 Reinforced Silver Jacket	4 Corrugated Aluminum Core	6 R-6.0 Insulation	
	3 Heavy-Duty (4 mil.) Black Polyethylene Jacket	9 Multi-Ply Metalized/Polyester Core	8 R-8.0 Insulation	

How to Order:

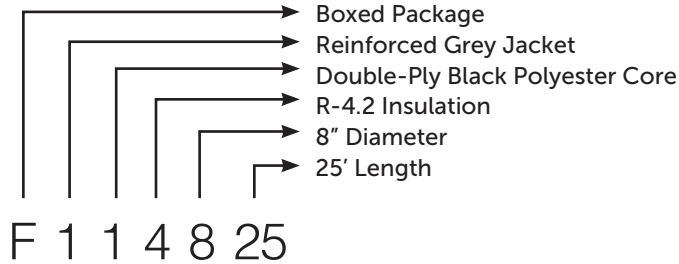

MUELLER STREAMLINE CO.

150 Schilling Blvd, Suite 201, Collierville, TN 38107 | 1-800-348-8464 | www.muellerstreamline.com

©2024 Mueller Streamline Co.