
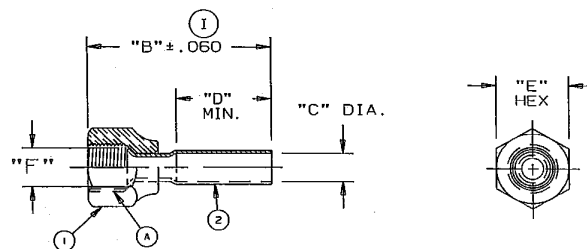


INTERNAL FLARE TO EXTENSION SOLDER BRASS FITTINGS FOR MULTI SPLIT SYSTEMS

Streamline® Brass 45° Flare Fittings are fabricated from brass forgings or drawn brass rod, eliminating the possibility of seepage by porosity. Fittings and flanges are accurately machined and fully protected against damage during handling, shipping and storage to assure tight leak-proof joints. Smooth interior finish provides unrestricted flow and reduced pressure drop.

- Recommended maximum working pressure (PS): 700psig, 48 bar
- Fabricated from brass forgings or drawn brass rod eliminating the possibility of seepage by porosity
- Accurately machined and fully protected against damage during shipping, handling and storage to assure tight leak-proof joints
- Smooth interior finish provides unrestricted flow and reduced pressure drop
- JIS Class II

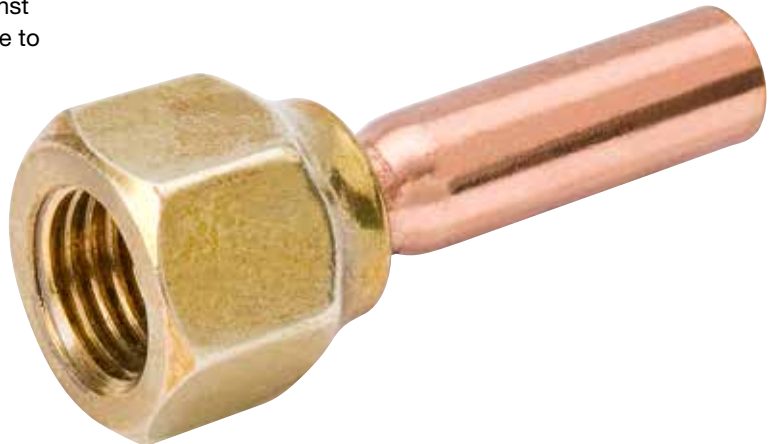

Part Number	Size Female Flare	B	C (ODS)	D	E (mm)	Each Wt.	Inner Qty	Master Qty
A 15725H	1/4	1.60	1/4	0.81	17	0.0430	25	1000
A 15726H	3/8	1.71	3/8	0.81	22	0.0740	25	600
A 15727H	1/2	1.89	1/2	0.88	26	0.1037	20	320
A 15728H	5/8	2.29	5/8	1.00	29	0.1600	10	240
A 15729H	3/4	2.85	3/4	1.25	36	0.3175	10	120