

Streamline®

Tube • Fittings • Valves



OilShield®

For use in Fuel Oil Applications



Streamline® OilShield® Coated Copper Tube comes coated with an orange layer of seamless, grooved polyethylene. Commonly used with the distribution of specific flammable liquids, OilShield® coated copper tube provides all the performance and reliability for which Streamline® copper tube is known but with the added advantage of high visibility, easy identification and enhanced protection by isolating the copper tube from corrosive environments common with petrochemical distribution and production. The grooved coating provides an internal channel/path that helps in recognizing and detecting any unforeseen leaks.



Standard Features

- UL Listed to UL971, Nonmetallic Underground Piping for Flammable Liquids
- .025" (minimum) polyethylene coating is extruded onto the copper providing consistent corrosion protection
- Made to ASTM & NFPA Standards
- Continuously marked with size, specification information, manufacturing code & footage every 2 feet
- Custom products & markings available upon request
- Made in Canada

Advantages


- Eliminates the need for continuous on-site tape wrapping or sleeving, creating a savings on labor & professional looking installation
- Coated tube is suitable for direct burial in concrete slabs
- Compatible with standard solder fittings & brazing techniques (alternative joining systems must comply to manufacturer's specs)
- Manufactured to reduce work hardening & stress corrosion cracking
- Provides protection against galvanic reaction

A BRAND OF MUELLER INDUSTRIES 

Installation



1. Cut and fold back plastic cover to reveal the copper tube

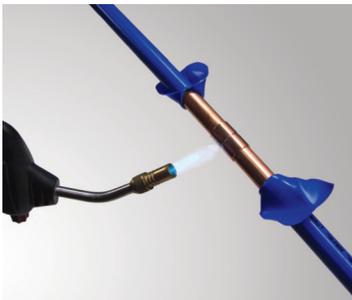

2. Install solder fittings in accordance with manufacturer's instructions and local codes

Note: If using a blowtorch, take care to keep the flame away from the plastic cover



3. When the joint is complete and cool, replace the plastic coat and wrap the joint to give continuity of protection

Note: 3M™ Scotchrap™ Tape 50, Shurtape® PW100 or comparable alternative is recommended to wrap the joint.

Mueller Industries' OilShield® meets the applicable requirements of the following codes:

- UL Listed to UL971, Nonmetallic Underground Piping for Flammable Liquids
- NFPA 31 Standard for the Installation of Oil-Burning Equipment
- International Residence Code - 2006*
- CAN/CSA B139*
- Uniform Mechanical Code
- International Fuel Gas Code - 2006*

Copper

- Copper Alloy is seamless UNS C12200 grade.
- Third party certified by Intertek Testing Services

Polyethylene

- Available in orange for fuel oil applications
- Coating is grooved along tube for enhanced leak protection
- Low density polyethylene (LDPE) resin, contains UV inhibitors
- Meets ICC requirements for minimum thickness for corrosion protective sheathing
- Operating temperatures are in the range of 0°F - 180°F with the coating remaining flexible down to -40°F.
- Provides adequate barrier to prevent galvanic



Grooved for enhanced leak protection.

Polyethylene-Coated Copper Tube

Nom Dia.	O.D. Dia.	TYPE K		TYPE L		COATED ACR		REFRIGERATION
		Lengths	Soft Coils	Lengths	Soft Coils	Type K	Type L	Soft Coils
1/4"	3/8"	-	60 ft., 100 ft.	-	60 ft., 100 ft.	-	-	50 ft., 100 ft., 250 ft.
3/8"	1/2"	-	60 ft., 100 ft.	-	60 ft., 100 ft.	-	-	50 ft., 100 ft., 250 ft.
1/2"	5/8"	20 ft.	60 ft., 100 ft.	20 ft.	60 ft., 100 ft.	20 ft.	20 ft.	50 ft., 100 ft., 250 ft.
5/8"	3/4"	20 ft.	60 ft., 100 ft.	20 ft.	60 ft., 100 ft.	20 ft.	20 ft.	50 ft., 100 ft.
3/4"	7/8"	20 ft.	60 ft., 100 ft.	20 ft.	60 ft., 100 ft.	20 ft.	20 ft.	50 ft., 100 ft.
1"	1-1/8"	20 ft.	60 ft., 100 ft.	20 ft.	60 ft., 100 ft.	20 ft.	20 ft.	50 ft., 100 ft.
1-1/4"	1-3/8"	20 ft.	60 ft., 100 ft.	20 ft.	60 ft., 100 ft.	20 ft.	20 ft.	-
1-1/2"	1-5/8"	20 ft.	-	20 ft.	-	20 ft.	20 ft.	-
2"	2-1/8"	20 ft.	-	20 ft.	-	20 ft.	20 ft.	-

The following are the three elements that cover the language needed for engineering specifications to allow the use of OilShield in petrochemical applications.

Part 1 – General

1.1 Summary

- A. OilShield[®] copper tube provides protection against corrosive environments and abrasive damage through a .025” minimum wall thickness of Polyethylene LDPE resin.
- B. OilShield copper tube is continuously marked with size, specification information, manufacturing code and footage every two feet.
- C. UL Listed to UL971, Nonmetallic Underground Piping for Flammable Liquids

Part 2 – Materials

2.1 Materials General

- A. All material applicable to the production of OilShield copper tube meets corresponding requirements for ASTM and NFPA codes and standards along with CAN/CSA B139.

2.2 OilShield Material

- A. Copper Tube
 - 1. Refrigeration Standard Copper Tube manufactured with UNS C12200 Copper Alloy.
- B. Polyethylene Coating
 - 1. Color coated orange to establish use with petrochemical applications
 - 2. Coating is a low density polyethylene LDPE resin which enhances common corrosion protection associated with standard petrochemical production and distribution environments.
 - 3. Coating is grooved along tube to provide enhanced leak protection.
 - 4. Contains UV inhibitors to minimize derogation if exposed to ultra violet light.
 - 5. Extruded seamlessly onto copper tubing with a minimum wall thickness of .025”
 - 6. Operating temperature is in the range of 0°F – 180°F
 - 7. Polyethylene coating will remaining flexible down to -40°F.
 - 8. Provides an adequate barrier between dissimilar metals to prevent galvanic corrosion.

Part 3 – Installation

3.1 Installation and Usage

- A. OilShield tube should be installed and used in accordance with appropriate specifications and codes or based upon Mueller Industries technical recommendations.

Technical Information



DOW DFDA-7059 NT 7

Linear Low Density Polyethylene Resin

DOW DFDA-7059 NT 7 Linear Low Density Polyethylene Resin is an ethylene-butene copolymer which is supplied in pelleted form. It is generally recommended for slot cast thin film applications requiring both clarity and toughness. It is excellent in coextruded, slot cast stretch wrap. This resin is also suitable for use in drip irrigation and hose and tube applications.

Main Characteristics

- High clarity
- High tensile strength
- High elongation
- Good puncture resistance
- Complies with U.S. FDA 21 CFR 177.1520(c) 3.1a. Consult the regulations for complete details.

Slip Additive: None
Antiblock Additive: None

Properties⁽¹⁾

Typical Physical	Test Method	Values(English (S.I.))
Melt Index, (I ₂) at 190°C/2.16 kg, g/10 min	ASTM D 1238	2.0
Density, g/cc	ASTM D 792	0.918
Film⁽²⁾, 1mil (25 µm)		
Dart Impact(Method A), g Method A	ASTM D 1709	70
Elmendorf Tear (Method B), g	MD	50
	CD	400
Ultimate Tensile, psi (MPa)	MD	5,000(34)
	CD	3,600(25)
Ultimate Elongation, %	MD	450
	CD	850
Gloss, 45°	ASTM D 2457	92
Haze, %	ASTM D 1003	2.5

Fabrication Conditions For Cast Film:

- Extrudable by conventional slot cast film extrusion equipment with only minor machine modifications necessary for optimum use.
- Melt Temperature: 520°F (270°C)

- (1) These are typical properties only and are not to be construed as specifications. Users should confirm results by their own tests.
- (2) Film properties are typical of slot-cast film extruded at 520°F (270°C).

Product Stewardship

The Dow Chemical Company and its subsidiaries (“Dow”) has a fundamental concern for all who make, distribute, and use its products, and for the environment in which we live. This concern is the basis for our Product Stewardship philosophy by which we assess the safety, health, and environmental information on our products and then take appropriate steps to protect employee and public health and our environment. The success of our Product Stewardship program rests with each and every individual involved with Dow products — from the initial concept and research, to manufacture, use, sale, disposal, and recycle of each product.

Customer Notice

Dow strongly encourages its customers to review both their manufacturing processes and their applications of Dow products from the standpoint of human health and environmental quality to ensure that Dow products are not used in ways for which they are not intended or tested. Dow personnel are available to answer your questions and to provide reasonable technical support. Dow product literature, including safety data sheets, should be consulted prior to use of Dow products. Current safety data sheets are available from Dow.

Medical Applications Policy

NOTICE REGARDING MEDICAL APPLICATION RESTRICTIONS: Dow will not knowingly sell or sample any product or service (“Product”) into any commercial or developmental application that is intended for:

- a. long-term or permanent contact with internal bodily fluids or tissues. “Long-term” is contact which exceeds 72 continuous hours (or for PELLETHANE™ Polyurethane Elastomers only, which exceeds 30 days);
- b. use in cardiac prosthetic devices regardless of the length of time involved (“cardiac prosthetic devices” include, but are not limited to, pacemaker leads and devices, artificial hearts, heart valves, intra-aortic balloons and control systems, and ventricular bypass-assisted devices);
- c. use as a critical component in medical devices that support or sustain human life; or
- d. use specifically by pregnant women or in applications designed specifically to promote or interfere with human reproduction.

Dow requests that customers considering use of Dow products in medical applications notify Dow so that appropriate assessments may be conducted.

Dow does not endorse or claim suitability of its products for specific medical applications. It is the responsibility of the medical device or pharmaceutical manufacturer to determine that the Dow product is safe, lawful, and technically suitable for the intended use. **DOW MAKES NO WARRANTIES, EXPRESS OR IMPLIED, CONCERNING THE SUITABILITY OF ANY DOW PRODUCT FOR USE IN MEDICAL APPLICATIONS.**

Disclaimer

NOTICE: No freedom from infringement of any patent owned by Dow or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, the Customer is responsible for determining whether products and the information in this document are appropriate for the Customer’s use and for ensuring that the Customer’s workplace and disposal practices are in compliance with applicable laws and other governmental enactments. Dow assumes no obligation or liability for the information in this document. **NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.**

NOTICE: If products are described as “experimental” or “developmental”: (1) product specifications may not be fully determined; (2) analysis of hazards and caution in handling and use are required; (3) there is greater potential for Dow to change specifications and/or discontinue production; and (4) although Dow may from time to time provide samples of such products, Dow is not obligated to supply or otherwise commercialize such products for any use or application whatsoever.

Additional Information

North America		Europe/Middle East	+800-3694-6367
U.S. & Canada:	1-800-441-4369		+32-3-450-2240
	1-989-832-1426		
Mexico:	+1-800-441-4369		
Latin America		South Africa	+800-99-5078
Argentina:	+54-11-4319-0100		
Brazil:	+55-11-5188-9000		
Colombia:	+57-1-219-6000	Asia Pacific	+800-7776-7776
Mexico:	+52-55-5201-4700		+60-3-7958-3392

www.dowplastics.com

Published October 2007
 © 2007 The Dow Chemical Company

